

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of: Michael D. Stapf
Title: Interface for an Enterprise Resource Planning Program
Attorney Docket No.: 500.720US1

PATENT APPLICATION TRANSMITTAL

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

We are transmitting herewith the following attached items and information (as indicated with an "X"):


- ☒ Utility Patent Application under 37 CFR § 1.53(b) comprising:
 - ☒ Specification (25 pgs, including claims numbered 1 through 26 and a 1 page Abstract).
 - ☒ Formal Drawing(s) (8 sheets).
 - ☒ Signed Combined Declaration and Power of Attorney (3 pgs).
 - ☒ Check in the amount of \$868.00 to pay the filing fee.
- ☒ Assignment of the invention to ADC Telecommunications, Inc. (2 pgs) and Recordation Form Cover Sheet.
- ☒ Check in the amount of \$40.00 to pay the Assignment recording fee.
- ☒ Return postcard.

The filing fee has been calculated below as follows:

	No. Filed	No. Extra	Rate	Fee
TOTAL CLAIMS	26 - 20 =	6	x 18 =	\$108.00
INDEPENDENT CLAIMS	3 - 3 =	0	x 78 =	\$0.00
[] MULTIPLE DEPENDENT CLAIMS PRESENTED				\$0.00
BASIC FEE				\$760.00
TOTAL				\$868.00

Please charge any additional required fees or credit overpayment to Deposit Account No. 19-0743.

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.
P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

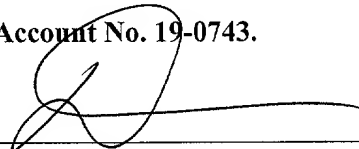By: 
Atty: David N. Fogg
Reg. No. 35,138

Customer Number 21186

"Express Mail" mailing label number: EM287848447US

Date of Deposit: April 14, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By: Chris Hammond

Signature: 

UNITED STATES PATENT APPLICATION

Interface for an Enterprise Resource Planning Program

INVENTOR

Michael D. Stapf
of Prior Lake, MN, USA

Schwegman, Lundberg, Woessner, & Kluth, P.A.
1600 TCF Tower
121 South Eighth Street
Minneapolis, Minnesota 55402
ATTORNEY DOCKET 500.720US1

Interface for an Enterprise Resource Planning Program

Technical Field of the Invention

The present invention relates generally to the field of computer software and, in particular, to an interface for an enterprise resource planning program.

Background

With the explosion of information available today, it has become critical for organizations to carefully manage their information to meet organizational objectives. Enterprise Resource Planning (ERP) systems are integrated information systems that have been developed to serve a variety of departments within an enterprise, e.g., corporation, to make effective use of its information. ERP systems evolved out of the manufacturing industry. Generally, ERP systems use packaged software rather than proprietary software written by or for one customer. ERP modules may be able to interface with an organization's own software with varying degrees of effort, and, depending on the vendor, ERP software may be alterable via programming.

ERP systems typically include software that manages information for use in manufacturing, order entry, accounts receivable and payable, general ledger, purchasing, warehousing, transportation and human resources. ERP systems are commercially available from companies such as SAP, PeopleSoft, Oracle, Baan, J.D. Edwards, and others.

One problem with ERP systems is loading or interfacing the ERP systems with data from existing systems, so-called "legacy data." For purposes of this specification, the terms "loading" and "interfacing" are used interchangeably to refer to providing data from a non-ERP system or data source to an ERP system. Conventionally, legacy data is provided to the ERP system through a custom-built interface. Taking SAP's R/3 ERP system as an example, the following steps are typically used to provide legacy data to the ERP system:

1. Determine the on-line transaction needed to load/update/delete the data in the ERP system.

2. Manually execute the screens for the transaction, writing down each screen and field name that is populated, as well as what buttons are pushed to navigate through the screens.
3. Design a fixed-format file layout for the legacy data.
- 5 4. Write a program to extract the legacy data from the legacy system using the file layout to format the data.
5. Write an SAP Batch Data Conversion (BDC) program to read data from the file extracted from the legacy system, and, using the data collected in (2) above, write a program in "ABAP" code--a specialized language for SAP's ERP system--to execute each screen, populate each field, and execute the navigation in the correct sequence.
- 10 6. Create test data using the file layout from (3) above.
7. Test the SAP BDC program to make sure it works properly, and that all fields and screens contain the correct data.
- 15 8. Execute the program generated in (4) above.
9. Redo (7) using the data from (8).
10. Once all debugging is complete, use SAP "transports" to move the SAP BDC program into a production mode.
- 20 11. Execute the SAP BDC program against the live production of the SAP system.

This process is time consuming and requires the expertise of a number of different people. For example, an SAP business analyst or end user gathers the information on the particular screens needed to get the data into the ERP system and to execute the final SAP BDC program. A programmer familiar with SAP BDC and ABAP programming language creates and tests the SAP BDC program. A programmer or analyst familiar with a programming language such as COBOL or C++ creates code to extract the data from the legacy system. Finally, an SAP BASIS transport specialist moves the SAP BDC program into production mode. At each point in this process, misunderstanding between each of these individuals could cause severe problems in providing the data to

the ERP system. Further, this process must be worked through completely to create a custom interface for each set of data to be provided to the ERP system.

For the reasons stated above, and for other reasons stated below which will become apparent to those skilled in the art upon reading and understanding the present specification, there is a need in the art for an improved interface for enterprise resource planning programs.

Summary

The above mentioned problems with interfacing with an enterprise resource planning program and other problems are addressed by the present invention and will be understood by reading and studying the following specification. An interface is described which provides data to an enterprise resource planning program from a data source using a parameter file that maps the enterprise resource planning system with the data source.

Brief Description of the Drawings

Figure 1 is a data flow diagram of an illustrative embodiment of a process for an interface for an enterprise resource planning program according to the teachings of the present invention.

Figure 2 is a flow chart that illustrates one embodiment of a process for an interface for an enterprise resource planning program according to the teachings of the present invention.

Figures 3A through 3E are screen shots that illustrate one embodiment of a process for an interface for an enterprise resource planning program according to the teachings of the present invention.

Figure 4 is a block diagram of an embodiment of a computer system having an interface for an enterprise resource planning program according to the teachings of the present invention.

Detailed Description

The following detailed description refers to the accompanying drawings which form a part of the specification. The drawings show, and the detailed description describes, by way of illustration specific illustrative embodiments in which the

invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. Other embodiments may be used and logical, mechanical and electrical changes may be made without departing from the scope of the present invention. The following detailed description is,

5 therefore, not to be taken in a limiting sense.

I. Overview

Figure 1 is a data flow diagram of an illustrative embodiment of a process for an interface, indicated generally at 102, for providing data to an enterprise resource planning (ERP) system 100 according to the teachings of the present invention. As
10 described above, ERP system 100 is an integrated information system that serves a variety of departments within an enterprise. ERP system 100 includes software that, for example, manages information for use in manufacturing, order entry, accounts receivable and payable, general ledger, purchasing, warehousing, transportation and human resources. ERP system 100 may comprise an ERP system that is commercially
15 available from SAP, PeopleSoft, Oracle, Baan, J.D. Edwards, or other vendors. ERP system 100 is described in terms of the SAP's R/3 ERP system although it is understood that interface 102 can be adapted for use with other ERP systems.

ERP system 100 has an interface for receiving data input. In the embodiment of Figure 1, the interface is a graphical user interface (GUI) that is represented by three
20 groups of screens. ERP system 100 includes screens for loading data for material masters 103, customers 104, and human resources 106. Each group of screens is used to enter data into associated fields for different transactions for ERP system 100. It is understood that these screens are shown by way of example and not by way of limitation. The screens provided in ERP system 100 can be varied as necessary for the
25 specific needs of an enterprise.

Interface 102 provides data from data files 108 to ERP system 100 using one or more associated parameter files 110. Advantageously, interface 102 provides a standard interface for all of the transactions for ERP system 100. Parameter files 110 provide interface 102 with the unique information necessary to provide data to ERP system 100
30 for a particular transaction. Thus, to provide data to ERP system 100 for a particular

transaction, a user need only create an appropriate parameter file that maps data in data file 108 with the appropriate screens and fields of ERP system 100. Interface 102 then uses the parameter file to load the data into the correct fields of the ERP system. Since the parameter file is simply a map between the data file and the ERP system, it can be
5 created using any acceptable text editor and does not require knowledge of a unique programming language.

Interface 102 can use a number of other files in providing data to ERP system 100. These files are identified in Table 1 below. Some of these files are described in further detail below. The particular files used in processing data for a transaction can be
10 determined by the parameter file.

File Name	Ext	Description	I/O
INFILE	.txt	Data used to fill in screens of ERP system	INPUT
ERRFILE	.err	Error messages generated while providing data to ERP system	OUTPUT
15 REJFILE	.rej	Records from INFILE for failed transactions	OUTPUT
REJPLUS	.rejplus	Same as REJFILE, but with failure code tacked on to beginning of each record	OUTPUT
PARMFILE	.prm	Parameters used to instruct interface how to fill in screens of ERP system	INPUT
RCDDDESC	.rcd	describes atypical INFILE record format	INPUT
20 AUDFILE	.aud	Identifies when each record set was read in and, optionally, if it worked or failed	OUTPUT
STOPFILE	.stop	Presence of file causes interface to cease processing data from INFILE	INPUT
MAILFILE	.mailout	Similar to ERRFILE but formatted for transmission via e-mail	OUTPUT
25 MAILLIST	.maillist	Lists e-mail addresses to receive MAILFILE	INPUT

Table 1

A. Parameter File (PARMFILE)

Parameter files 110 describe the relationship between a data file and ERP system 100. Essentially, a parameter file describes, for interface 102, where to find data in the associated data file for each field of the screens of ERP system 100 and how to navigate through the screens of ERP system 100.

In one embodiment, the parameter file contains a list of parameters to be processed by interface 102. Parameter files can be created using any appropriate text editor. Each parameter is provided as one or more lines within the parameter file.

1. General parameters

Table 2 provides one embodiment of a format for general parameters of parameter file 110. This embodiment is provided by way of illustration and not by way of limitation and relates to the SAP R/3 ERP system.

Field	Columns	Description	Example
1	1 - 4	SAP transaction code	MM01
2	5 - 12	SAP screen ID	SAPLMGMM
3	13 - 16	SAP screen number	0060
4	17 - 49	SAP field name	RMMG1-MATNR
5	50 - 54	Input file record number	always 00001 for MULTIRCD=N
6	55 - 59	Starting column in input file	00001
7	60 - 64	Field length in input file	00005
8	65 - 187	(optional) Default field value	-X

Table 2

In this embodiment, each parameter is placed in a single line within parameter file 110.

It is understood that the parameters used in parameter files 110 can differ from the parameter format described above with respect to Table 2. For example, the order of the fields in the parameter can be changed. Further, the parameters can be based on additional information that is useful in generating commands to provide data to ERP

system 100. An example of the implementation of this parameter format is provided below in Section II.

If the field length defined in field 7 of the parameter is zero, the value in the default area of field 8 of the parameter is used even if the parameter specifies a valid offset. This is advantageous for providing spaces to a field of the ERP system without providing a space filler field on the data file (INFILE).

If the record number defined in field 5 is zero, the value in the default area (field 8) is used by interface 102. If length (field 7) is greater than zero, that number of characters from the default area (field 8) is used. This is another way to place a defined number of spaces into a field on a screen of the ERP system.

If the value in field 5 does not correspond to a valid record number, then interface 102 ignores the parameter. Further, when the record number in field 5 is zero (00000), the record will always be processed. In this case, the default value in Field 8 will be used, and not data from the input file (INFILE).

2. Conditional Logic Parameters

Parameter file 102 may also include conditional logic so that parameters may be executed conditionally. In one embodiment, this conditional logic includes IF/ELSE/ENDIF and FOR/NEXT constructs although other conventional logic functions can be used. The IF construct can take one of at least two different forms. First, the IF construct can be formatted as follows:

?IF aaaaa,bbbbbb,cccc OP 'up to 132 characters of value to test against'

Alternatively, the IF statements can be formatted as:

?IF aaaaa,bbbbbb,cccc OP dddddd,eeee,ffff

In these cases, aaaaa and dddddd correspond to a record number for a record in the data file. Further, bbbbbb and eeeee correspond to a starting column for a field in the data file. The elements ccccc and fffff correspond to the length of the field in the data file. The element "OP" defines the basis of the comparison for the conditional logic.

Exemplary values for the OP element are provided in Table 3. It is understood that the OP element can also take on other values.

Value	Definition
EQ	Equal
NE	Not equal
GT	Greater than
GE	Greater than or equal to
LT	Less than
LE	Less than or equal to

Table 3

- 10 The end of an if statement is defined by an ?ENDIF element. The “?ELSE” conditional logic may be used in conjunction with the ?IF conditional logic to provide an alternative in the event that the condition of the ?IF statement is not met.

The ?IF statements can be nested.

- 15 When ?IF logic is encountered, if there is an error in the ?IF statement (such as referring to a record that does not exist), control passes to the statement beyond the corresponding “?ENDIF” statement and no intervening statements are executed.

3. Control Statements

- Parameter file 110 can also provide control statements. Control statements typically start in column one of a parameter. In general, these control statements provide instruction to interface 102 to control the processing of data. For example, in one embodiment, control statements include “?EOT” and “?OFFSETMULTI.” Each of these control statements are discussed in turn.

- 25 The control statement “?EOT” can be used to indicate the end of a transaction. This causes the CALL TRANSACTION function of ERP system 100 to be explicitly performed. The ?EOT control statement can be located at any point within parameter file 110. It allows a CALL TRANSACTION function to be performed before all of the parameters are processed for a particular data record in data file 108.

The control statement “?OFFSETMULTI” can be used to allow start columns to refer to the actual column in multi-record input files, instead of relative to the beginning

of the data area of the multi-record input file. Multi-record input files are described in more detail below in Section I.B. At this point, it is sufficient to state that when multiple records are grouped together for a single transaction, the data in each record does not begin in the first column. However, field starting columns are generally
5 defined for interface 102 as being relative to the beginning of where data values starts. Thus, when the data field starts in column 63, for example, the ?OFFSETMULTI statement can be used to allow the parameter to indicate that data starts in column 63 instead of column 1 of the data area.

4. Restart Option

10 Interface 102 can include an option (RESTARTING OPTIONS) to control restart of interface 102 for datafile 108. The values for this parameter can be “No restart,” “Restart: run if prev run OK,” and “Restart: NO RUN if prev run OK.” It is understood that other restart options can also be used. Each of these three options are described in turn below.

15 The value “No restart” means that interface 102 is to always start with the first record in the input file whether or not a prior run processed some or all of the data in datafile 108 successfully.

The value “Restart: run if prev run OK” means that interface 102 is to start with the first record in the input file if the AUDFILE indicates that the prior run completed
20 correctly. If however, the prior run ended abnormally, this option means that interface 102 is to start with the next record after the last correctly processed record.

Finally, the value “Restart: NO RUN if prev run OK” means that if a prior run completed normally, interface 102 is to do nothing. However, if the prior run aborted, interface 102 is to start with the next record.

5. Miscellaneous Options

Interface 102 may also include one or more of the miscellaneous options described in Table 4.

	Parameter	Value(s)	Description
	MULTIRCD	Y/N	Indicates whether there are multiple records in the INFILE file for a single transaction execution
	TRAN_CD	**** or transaction code	Indicates to interface 102 which transactions in a PARMFILE to execute; the value "****" indicates to execute all transactions in the PARMFILE
5	INP_MODE	A/E/N	A=Show all screens as executed E=Show only screens that have errors N=Show no screens
	BDCONERR	Y/N	Indicates BDC screen commands appear in the error file for transactions that fail.
	MESSAGE NUMBERS	-	Lists message numbers that interface 102 will skip when writing errors to the MAILFILE. If the message number is listed, the error appears on the ERRFILE, but will not appear in the MAILFILE.
10	E-MAIL ADDRESSES	Addresses	A list of E-mail addresses that are to receive a copy of the MAILFILE.
	UNIX COMMAND FOR SENDING MAIL	-	Used if a non-standard UNIX executable is required for actually sending the MAILFILE.

15

Table 4

B. The Data Files

Data files 108 can take on many different forms. For example, data file 108 may comprise data from an existing system that is being replaced by ERP system 100. Alternatively, the data of data file 108 may be generated by a stand-alone system

that creates data in an on-going manner, e.g., shipping software, that may be used by ERP system 100. The data in data files 108 is referred to generally as “legacy data.”

Data file 108 (INFILE) can have two slightly different record layouts. The particular layout is indicated to interface 102 using the MULTIRCD option described above. When the value of the MULTIRCD option is “Y,” multiple data records are necessary to complete a transaction for ERP system 100. The format of data file 108 in this case is provided, by way of example and not by way of limitation, in table 5 below.

Column	Description
1 - 48	Unique key identifying the record set
49 - 53	Record number within the record set
54 - 62	Accumulator field
63 - 8063	Data values

Table 5

When the value of the MULTIRCD parameter is “N,” all of the columns in data file 108 (e.g., columns 1 - 8000) each contain data values.

When the value of the MULTIRCD parameter is “Y,” the unique key distinguishes for interface 102 which records belong together in a record set. Further, the record number keeps the records in a record set in the correct order. The accumulator field provides a way to give a total for failed and successful transactions. A “record set” is all the records that, combined, provide the data needed to complete all the ERP transactions in the PARMFILE once (e.g., to be able to create 1 Material Master). When the value of the MULTIRCD parameter is “N,” there is only one record needed to complete all the SAP transactions in the PARMFILE once.

C. Other Files

The following additional files may be used by interface 102 in processing data for ERP system 100.

1. *RCDDDESC*:

The RCDDDESC file is used to define where the key field [KEYFLD], accumulator field(s) [ACCUM], and field data values [FLDVLU\$] appear on the input file. The layout of one embodiment of a RCDDDESC file is provided in Table 6.

5

Columns	Description
1 - 8	Keyword (KEYFLD,ACCUM,FLDVLU\$)
10 - 14	Input file record number
16 - 20	Starting column in input file (e.g. 00001)
22 - 26	Field length in input file (e.g. 00005)
28 - 47	(optional) User-defined accumulator field name

10

Table 6

2. *MAILLIST*

The MAILIST file contains e-mail addresses that are used to report errors. Each line of the file is a single E-mail address. Each address will receive a copy of the MAILFILE formatted errors file.

15

3. *AUDFILE*

The AUDFILE stores information while interface 102 processes data in input file 108. In one embodiment, interface 102 looks for a completed AUDFILE before beginning processing. This prevents accidental re-running of already processed data. To process further data, the AUDFILE is removed from the system.

20

D. The Interface Process

Figure 2 is a flow chart that illustrates one embodiment of a process for an interface for an enterprise resource planning program according to the teachings of the present invention. The method begins at block 200 and opens the files associated with the data to be processed by interface 102. For example, the method opens parameter file 110 (PARMFILE), data file 108 (INFILE), and any other files associated with the data

25

to be processed. At block 202, the method reads the parameters into an internal table from the PARMFILE.

At block 240, the method retrieves information from the AUDFILE as to whether a previous run existed, and if so, if the previous run was successfully
5 completed. At block 242, the method determines whether there was a previous rung. If there was a previous run, the method proceeds to block 244. If there were no previous run, the method proceeds to block 256.

At block 244, the method determines whether the Restart option was “No Restart.” If so, the method proceeds to block 256. If the Restart option was not “No
10 Restart,” the method proceeds to block 246.

At block 246, the method determines whether the Restart option was “Run if Prev OK.” If so, the method proceeds to block 250. If the Restart option was not “Run if Prev OK,” the method proceeds to block 248.

At block 248, the Restart option is assumed to be “NO RUN if prev run OK”
15 since the other two options failed. Here, the method determines whether the previous run completed successfully. If the previous run completed successfully, the method proceeds to block 254 and interface 102 ends processing. If the previous run did not complete successfully, the method proceeds to block 252.

At block 250, the method determines whether the previous run completed
20 successfully. If so, the method proceeds to block 256. If the previous run did not complete successfully, the method proceeds to block 252 where it retrieves data from the INFILE until it obtains the set following the last correctly processed set of data. The method then proceeds to block 206.

At block 256, the method retrieves the first set of data records from the INFILE
25 and proceeds to block 206.

At block 206, the method determines whether the end of the data in the INFILE has been reached. If so, the method proceeds to block 260, where all associated input and output files are closed, and then to block 262, where the MAILFILE is sent via e-mail to all specified recipients. Interface 102 then ends processing at block 210.

If the end of the data in the INFILE has not been reached at block 206, then the method proceeds to block 258 and retrieves the first parameter in the PARMFILE. At block 212, the method determines whether the end of the parameters has been reached for this data record. If the end of the parameters in the PARMFILE has not been
5 reached, the method proceeds to block 214. At block 214, the method determines whether there is data associated with the parameter. If not, the method proceeds to block 208 and retrieves the next parameter and then returns to block 212. If, at block 214, the method determines that there is data associated with the parameter, then the method proceeds to block 216.

10 At block 216, the method creates an SAP BDC command from the parameter and data values. This command is placed in an internal table. The method proceeds to block 208 and retrieves the next parameter.

If, at block 212, the method determines that the last parameter from the PARMFILE has been processed, the method proceeds to block 218. At block 218, the
15 method uses the internal table to do an SAP "CALL TRANSACTION" to execute screens based on the processed parameters of the PARMFILE. The method proceeds to block 220.

At block 220, the method determines whether there are errors in processing the screens for the CALL TRANSACTION. If there are errors, the errors are written to
20 ERRFILE, REJFILE, and MAILFILE as defined above. These files are used to track errors in the process executed by interface 102. The method proceeds to block 224.

If there are no errors, then the method proceeds from block 220 to block 224 and writes the results to an audit file (e.g., AUDFILE). The method then returns to block 204 and retrieves the next set of data records. When all data records have been
25 processed, the method closes files at block 260, sends e-mail at block 262, and ends at block 220.

II. Example

Figures 3A through 3E are screen shots that illustrate an example of the process
30 of Figures 1 and 2 for providing data to an ERP system. This example also includes the

PARMFILE and INFILES listed below. This example relates to updating a profit center on a material master.

A. The PARMFILE

5 The PARMFILE for this example is as follows:

?IF 00001, 00001, 00004 EQ '0000'

** do nothing invalid plant ID

?ELSE

?IF 00001, 00005, 00018 EQ ' ',

10 **do nothing material number is missing

?ELSE

?IF 00001, 00047, 00010 EQ ' ',

**do nothing profit center is missing

?ELSE

15 *enter part number, and press SELECT VIEW(S)

MM02 SAPLMGMM 0060 RMMG1-MATNR 001 00005 00018

MM02 SAPLMGMM 0060 BDC_OKCODE 001 00000 00000 /5

*

* Select Basic Data view from pop-up and press ENTER

20 MM02 SAPLMGMM 0070 MSICHTAUSW-KZSEL(1) 001 00000 00000 X

MM02 SAPLMGMM 0070 BDC_OKCODE 001 00000 00000 /00

*

*From the Basic Data Screen, select the menu option to go to the Storage screen

25 MM02 SAPLMGMM 3004 BDC_OKCODE 001 00000 00000 SP13

*

* On pop-up, enter the plant number and press ENTER to continue to Storage screen

MM02 SAPLMGMM 0081 RMMG1-WERKS 001 00001 00004

MM02 SAPLMGMM 0081 BDC_OKCODE 001 00000 00000 /00

30 *

*Update the profit center on the Storage screen, and press SAVE button

MM02 SAPLMGMM 3000 MARC-PRCTR 001 00047 00010

MM02 SAPLMGMM 3000 BDC_OKCODE 001 00000 00000 /11

*

5 ?ENDIF

?ENDIF

?ENDIF

This PARMFILE uses three conditional parameters. First, the PARMFILE looks for a
10 plant ID in the first four columns of the data file. The value "0000" is defined as an
invalid plant ID. The second conditional parameter looks for a material number in the
18 columns following the plant ID. The conditional parameter fails if the material
number is missing (e.g., spaces only, no data). The final conditional parameter
determines whether the profit center is found in the ten spaces beginning in column 47.
15 If a data record does not fail any one of these conditional parameters, then interface 102
proceeds to gather information to perform a CALL TRANSACTION using the data in
the selected data record of the INFILE. The layout of the INFILE is described below.

B. The INFILE

20 The INFILE for this example includes three main fields. These fields include: a
plant ID, a material number and a profit center. The INFILE for this example contains
four records. The first three each fail to meet one of the conditional parameters. The
final entry is valid and Figures 3A through 3F illustrate the manner in which the data is
applied to ERP system 100 using the PARMFILE. The INFILE includes the following
25 four lines of data records:

0000

0081

00811000197

30 00811000197

ADM

instructs interface 102 to select the Basic data option in the Select View(s) screen 306 as indicated by check box 308. The parameter

MM02 SAPLMGMM 0070 BDC_OKCODE 001 00000 00000 /00

5

selects the ENTER key. Next, Basic Data screen 310 of Figure 3C is displayed. The parameter

MM02 SAPLMGMM 3004 BDC_OKCODE 001 00000 00000 SP13

10

selects organization levels button 311 to proceed to the organization levels screen 312 of Figure 3D. When screen 312 pops-up, the parameter

MM02 SAPLMGMM 0081 RMMG1-WERKS 001 00001 00004

15

causes the plant ID to be applied to field 314 of screen 312. The parameter

MM02 SAPLMGMM 0081 BDC_OKCODE 001 00000 00000 /00

20 causes the ENTER key to be pressed to bring up storage screen 316 of Figure 3E. The parameter

MM02 SAPLMGMM 3000 MARC-PRCTR 001 00047 00010

25 updates profit center field 318 on the Storage screen 316 with the value "ADM." The parameter

MM02 SAPLMGMM 3000 BDC_OKCODE 001 00000 00000 /11

30 presses SAVE button.

III. Computer System

Figure 4 is a block diagram of an embodiment of a computer system, indicated generally at 400, having an interface for an enterprise resource planning program according to the teachings of the present invention. For example, computer system 400 may implement embodiments of the processes described above with respect to Figures 1 and 2.

System 400 is a microprocessor based computer. Computer 400 includes processor 403 such as a Power PC 604, 604E, or 564 from IBM Corporation. Processor 403 is coupled to memory 405, and data storage device(s) 407 (e.g., hard disk drive, floppy disk drive, CD ROM or other appropriate computer readable medium). The computer uses an operating system such as AIX 4.2.1 from IBM Corporation or other appropriate operating system. Processor 403 is further coupled to screen 404, and input devices 406.

Input device(s) 406 includes, for example, a key pad, keyboard, mouse, touch screen, serial port or other device for providing inputs to processor 403. Storage device(s) 407 stores program code for executing instructions to implement one or more of the methods described above to provide data to an ERP system from a legacy data source. For example, storage device(s) 407 store at least one parameter file and at least one data file and program code for interface 102 that are used to provide the data to an ERP system.

Conclusion

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present invention. For example, the embodiments are described in terms of an interface for an ERP system from SAP. It is understood that the interface described herein is not limited to use with the SAP system. Parameter files and data files can be used with interface 102 to interface with other ERP systems. Further, other conditional logic parameters can be used in conjunction with or in place of the conditional logic

parameters described herein. It is further noted that although computer system 400 is described in terms of a Power PC from IBM, it is understood that a computer using another type of processor, such as a processor from Intel Corporation, and the Microsoft Windows NT operation system available from Microsoft Corporation can also be used.

What is claimed is:

1. A method for interfacing with an enterprise resource planning system, the method comprising:

5 providing a file containing data to be loaded into the enterprise planning system (the “data file”);

creating a file containing at least one parameter (the “parameter file”), wherein the parameter file maps data from the data file to screens of the enterprise resource planning system; and

10 processing each record in the data file according to the parameters in the parameter file to execute screens of the enterprise resource planning system so as to provide the data from the data file to the enterprise resource planning system.

2. The method of claim 1, wherein providing the file containing data comprises extracting the data from an legacy system.

15

3. The method of claim 1, wherein creating a file containing at least one parameter includes creating a file that also includes conditional logic associated with the parameters.

20 4. The method of claim 1, wherein creating a file containing at least one parameter comprises creating a file with a text editor.

5. The method of claim 1, wherein creating a file containing at least one parameter comprises creating a file with at least one parameter that includes a transaction code, a screen identification code, a screen number, and a field name associated with the
25 enterprise resource planning system and a field location value and a field length associated with the data file.

6. The method of claim 1, wherein processing each record in the data file
30 comprises:

retrieving a record from the data file;
retrieving parameters from the parameter file;
creating commands for the enterprise resource planning system based on the
parameters and the data in the retrieved record; and

5 executing screens of the enterprise resource planning system based on the
created commands.

7. The method of claim 6, wherein retrieving parameters includes retrieving
conditional logic parameters.

10

8. The method of claim 1, and further recording errors when executing screens of
the enterprise resource planning system.

9. The method of claim 1, and further recording in an audit file a result for each
15 record of the data file.

10. The method of claim 1, and further comprising transmitting results of a run of
the method to at least one e-mail address.

20 11. The method of claim 1, and further selectively ceasing processing the records in
the data file.

12. The method of claim 1, and further comprising restarting the processing of
records in the data file at a point in the data file corresponding to a last record processed
25 during a prior execution of the method with the data file.

13. A method for providing data to an Enterprise Resource Planning system, the
method comprising:

30 opening a parameter file containing a plurality of parameters;
 opening an associated data file containing a plurality of records;

wherein the parameter file maps data from the data file to screens of the Enterprise Resource Planning system;

for each record in the data file, creating commands based on the plurality of parameters; and

5 executing the commands to provide the data from the data file to the Enterprise Resource Planning system.

14. The method of claim 13, wherein opening a parameter file comprises opening a parameter file that includes conditional parameters.

10

15. The method of claim 13, wherein opening a parameter file comprises opening a parameter file that includes a restart option.

16. The method of claim 13, and further recording in an audit file a result for each
15 record of the data file.

17. The method of claim 13, and further comprising transmitting processing results to at least one e-mail address.

20 18. The method of claim 13, wherein creating commands based on the plurality of parameters comprises creating commands based on the plurality of parameters and at least two associated records.

19. The method of claim 13, wherein opening a parameter file comprises opening a
25 parameter file that includes parameters that each have a transaction code, a screen identification code, a screen number, and a field name associated with the enterprise resource planning system and a field location value and a field length associated with the data file.

20. A computer-readable medium encoded with a computer program for execution by a processor to perform a method comprising:

opening a parameter file containing a plurality of parameters;

opening an associated data file containing a plurality of records;

5 for each record in the data file, creating commands based on the plurality of parameters; and

executing the commands to provide the data from the data file to an Enterprise Resource Planning system.

10 21. The computer readable medium of claim 20, wherein opening a parameter file comprises opening a parameter file that includes conditional parameters.

22. The computer readable medium of claim 20, wherein opening a parameter file comprises opening a parameter file that includes a restart option.

15

23. The computer readable medium of claim 20, and further recording in an audit file a result for each record of the data file.

20 24. The computer readable medium of claim 20, and further comprising transmitting processing results to at least one e-mail address.

25. The computer readable medium of claim 20, wherein creating commands based on the plurality of parameters comprises creating commands based on the plurality of parameters and at least two associated records.

25

26. The computer readable medium of claim 20, wherein opening a parameter file comprises opening a parameter file that includes parameters that each have a transaction code, a screen identification code, a screen number, and a field name associated with the enterprise resource planning system and a field location value and a field length

30 associated with the data file.

[illegible]

5

"Express Mail" mailing label number: EM287848447 US
 Date of Deposit: APR 14 1999
 I hereby certify that this paper or fee is being deposited with the
 United States Postal Service "Express Mail Post Office to Addressee"
 service under 37 CFR 1.10 on the date indicated above and is
 addressed to the Assistant Commissioner for Patents,
 Washington, D.C. 20231
 Printed Name: CHRIS HAMMOND
 Signature: Chris Hammond

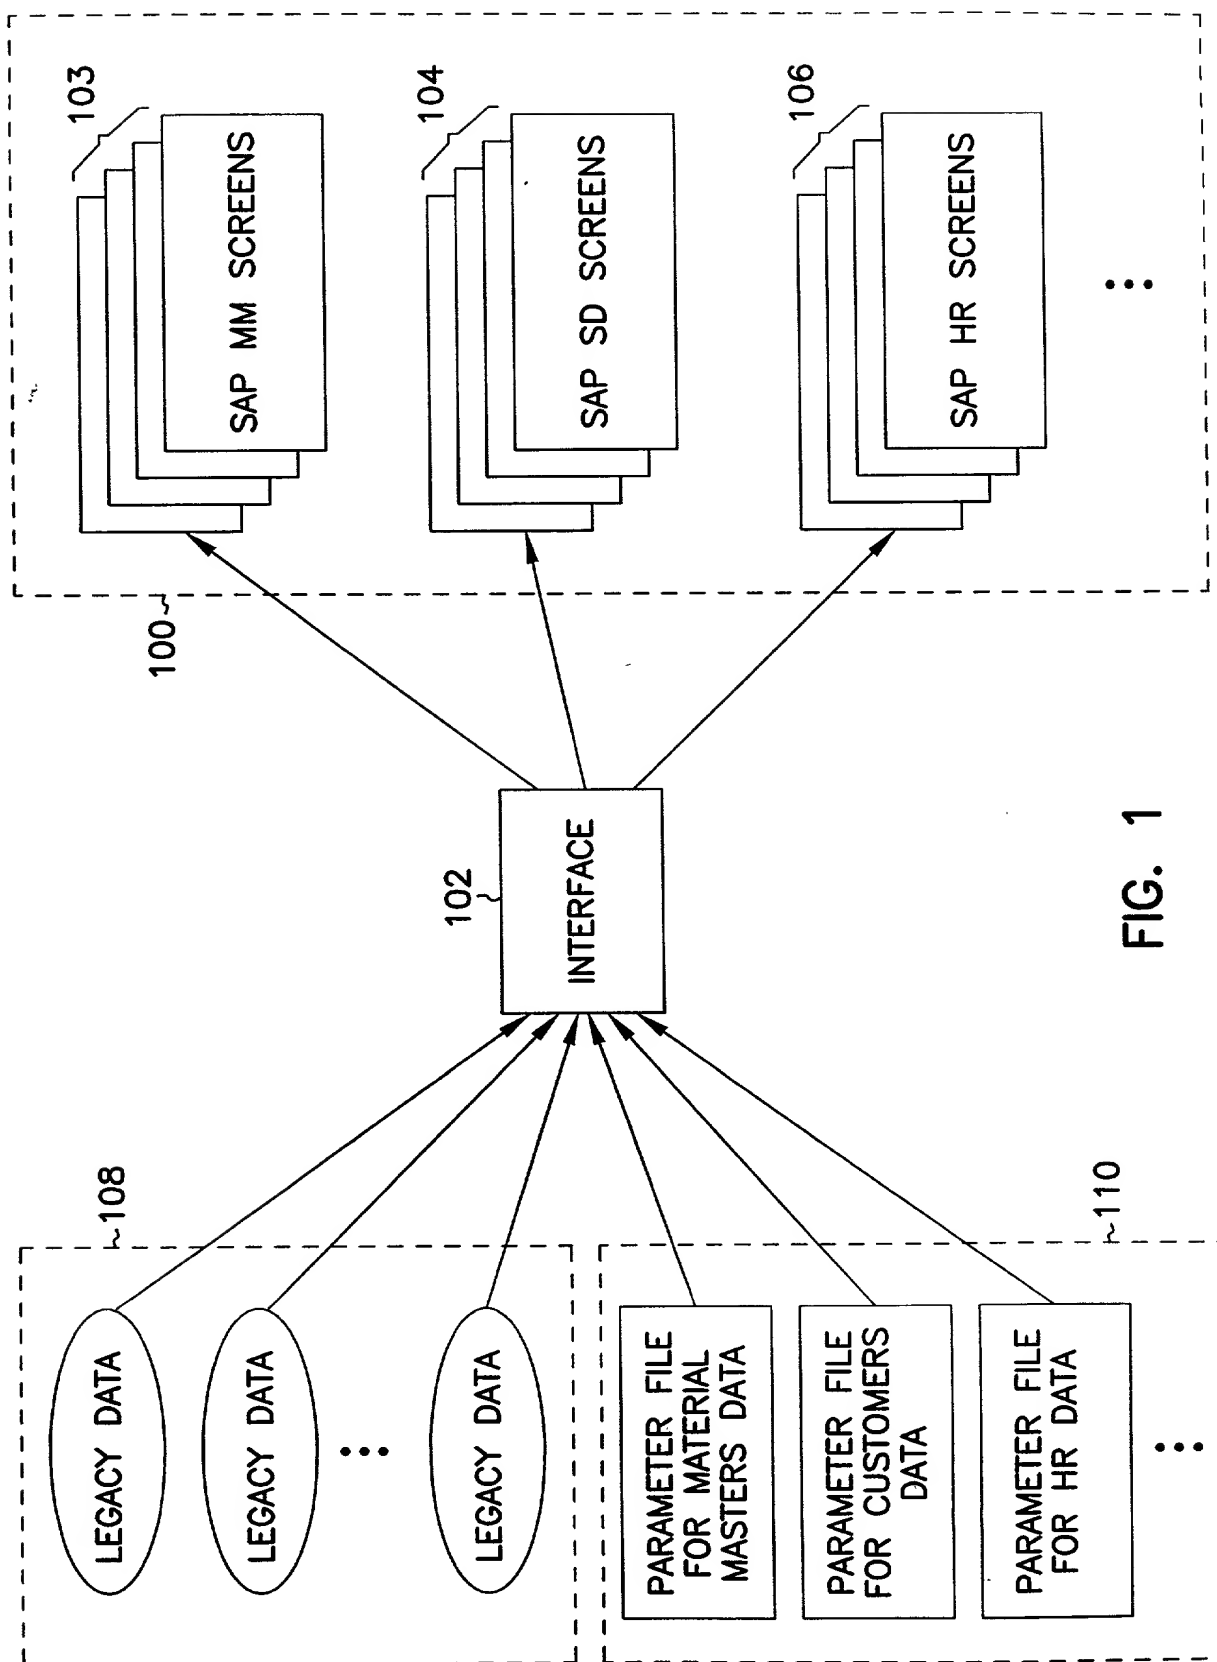


FIG. 1

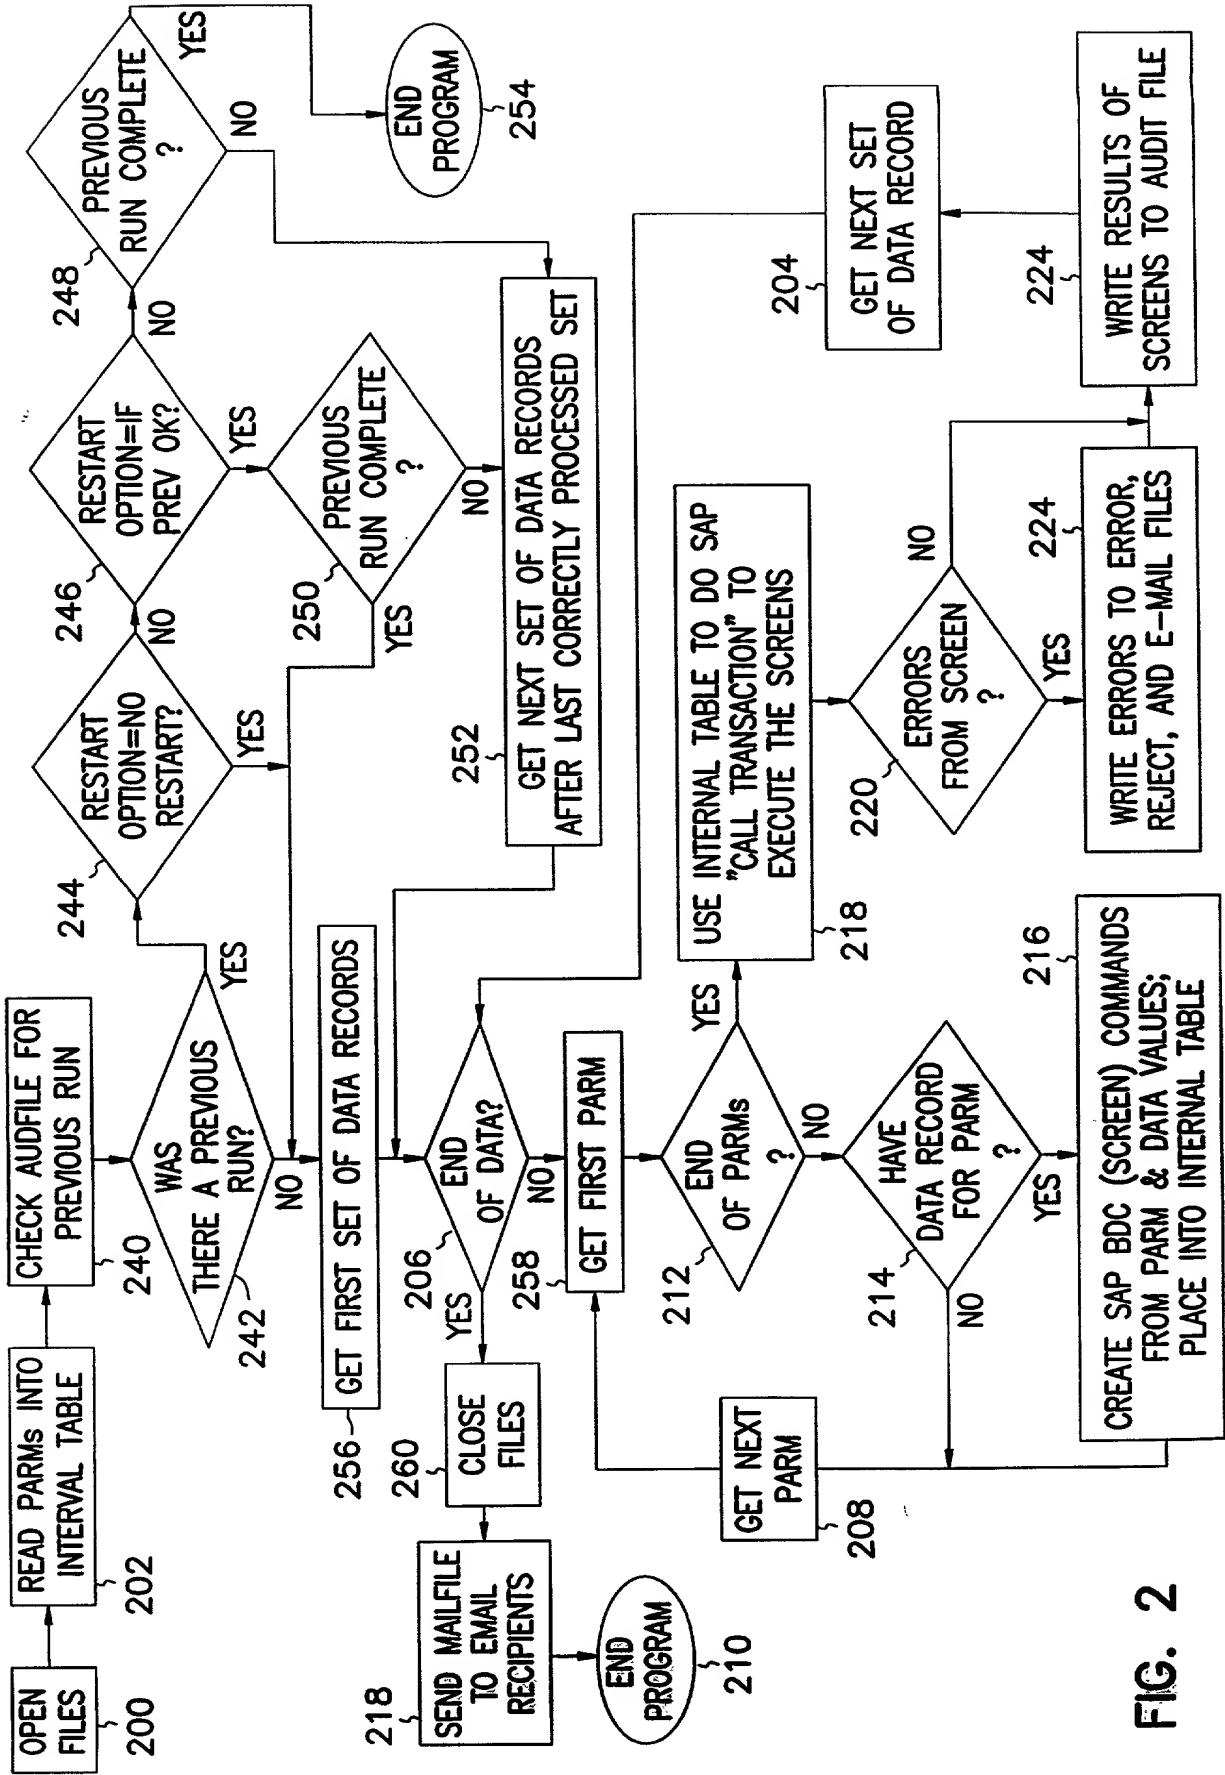


FIG. 2

302

304

300

Change Material: Initial Screen

Material Edit Goto Defaults Environment System Help

✓ /05

Select view(s) | Organizational levels | Data

Material: 1000197

Change number:

[D01: (1) 1030] [501: 001] [DVR] [10:33AM]

FIG. 3A

306

308

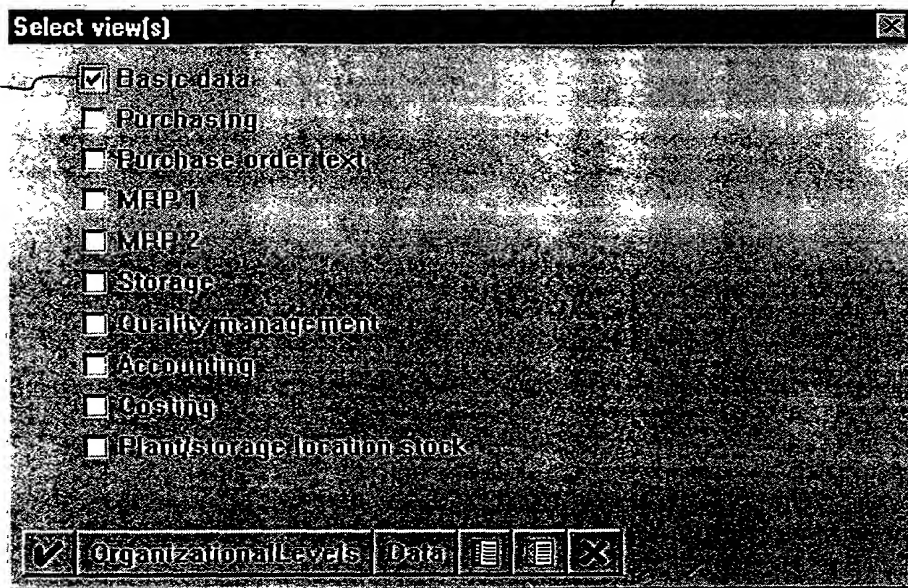


FIG. 3B

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

[illegible]

FIG. 3C

4

314

312

Organizational levels

Organizational levels

Plant 0081

Storage Location

✓ X

FIG. 3D

318

FIG. 3E

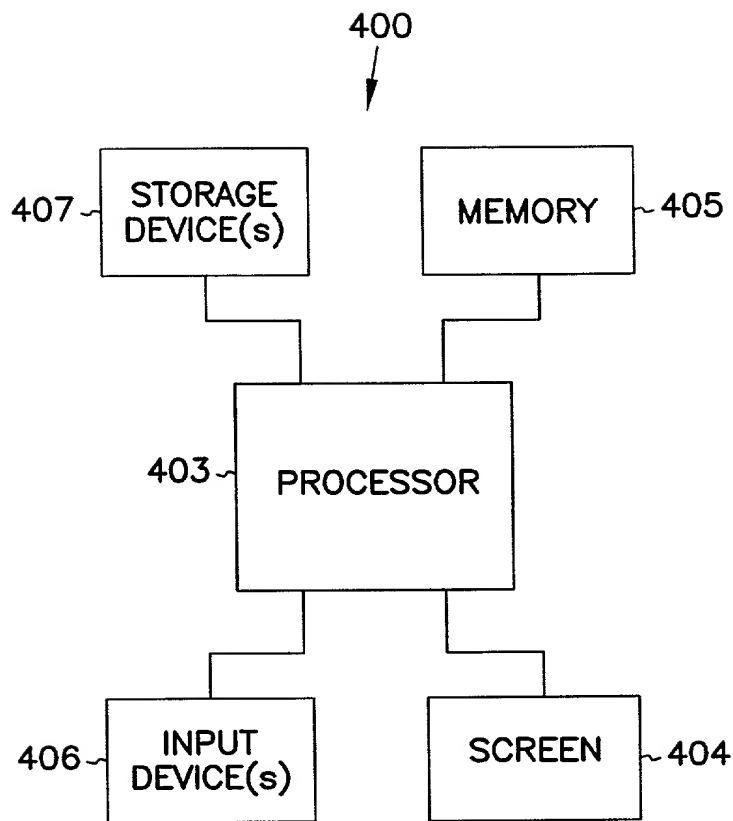


FIG. 4

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **Interface for an Enterprise Resource Planning Program**.

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (see page 3 attached hereto). I also acknowledge my duty to disclose all information known to be material to patentability which became available between a filing date of a prior application and the national or PCT international filing date in the event this is a Continuation-In-Part application in accordance with Title 37, Code of Federal Regulations §1.63(e).

I hereby claim foreign priority benefits under Title 35, United States Code, §119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

No such claim for priority is being made at this time.

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

No such claim for priority is being made at this time.

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

No such claim for priority is being made at this time.

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Adams, Matthew W	Reg. No. 43,459	Forrest, Bradley A.	Reg. No. 30,837	Maki, Peter C.	Reg. No. 42,832
Anglin, J. Michael	Reg. No. 24,916	Harris, Robert J.	Reg. No. 37,346	Mates, Robert E.	Reg. No. 35,271
Arora, Suneel	Reg. No. 42,267	Holloway, Sheryl S.	Reg. No. 37,850	McCrackin, Ann M.	Reg. No. 42,858
Bianchi, Timothy E.	Reg. No. 39,610	Huebsch, Joseph C.	Reg. No. 42,673	Oh, Allen J.	Reg. No. 42,047
Billion, Richard E.	Reg. No. 32,836	Kalis, Janal M.	Reg. No. 37,650	Padys, Danny J.	Reg. No. 35,635
Black, David W.	Reg. No. 42,331	Klima-Silberg, Catherine I.	Reg. No. 40,052	Polglaze, Daniel J.	Reg. No. 39,801
Brennan, Thomas F.	Reg. No. 35,075	Kluth, Daniel J.	Reg. No. 32,146	Schwegman, Micheal L.	Reg. No. 25,816
Brooks, Edward J., III	Reg. No. 40,925	Lacy, Rodney L.	Reg. No. 41,136	Sieffert, Kent J.	Reg. No. 41,312
Clark, Barbara J.	Reg. No. 38,107	Leffert, Thomas W.	Reg. No. 40,697	Slifer, Russell D.	Reg. No. 39,838
Drake, Eduardo E.	Reg. No. 40,594	Lemaire, Charles A.	Reg. No. 36,198	Steffey, Charles E.	Reg. No. 25,179
Eliseeva, Maria M.	Reg. No. 43,328	Litman, Mark A.	Reg. No. 26,390	Terry, Kathleen R.	Reg. No. 31,884
Embretson, Janet E.	Reg. No. 39,665	Lundberg, Steven W.	Reg. No. 30,568	Viksnins, Ann S.	Reg. No. 37,748
Fogg, David N.	Reg. No. 35,138	Mack, Lisa K.	Reg. No. 42,825	Woessner, Warren D.	Reg. No. 30,440
Forденbacher, Paul J	Reg. No. 42,546				

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization/who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Schwegman, Lundberg, Woessner & Kluth, P.A. to the contrary.

Please direct all correspondence in this case to Schwegman, Lundberg, Woessner & Kluth, P.A. at the address indicated below:

P.O. Box 2938, Minneapolis, MN 55402
Telephone No. (612)373-6900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of sole inventor : **Michael D. Stapf**
Citizenship: **United States of America**
Post Office Address: **4124 Raspberry Ridge Road**
Prior Lake, MN 55372

Residence: **Prior Lake, MN**

Signature: _____

Michael D. Stapf

Date: _____

4/6/99

Full Name of inventor:
Citizenship:
Post Office Address:

Residence:

Signature: _____

Date: _____

Full Name of inventor:
Citizenship:
Post Office Address:

Residence:

Signature: _____

Date: _____

Full Name of inventor:
Citizenship:
Post Office Address:

Residence:

Signature: _____

Date: _____

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.